




Features

- ✓ IP68
- ✓ CRI>83
- ✓ Durable
- ✓ High Safety
- ✓ Wide Range of Use


Benefits

- ✓ High Energy Saving
- ✓ High Efficiency
- ✓ Eye Protection
- ✓ Long Life Time
- ✓ Private Mold


Application

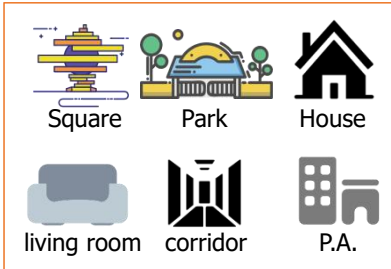

Certificate

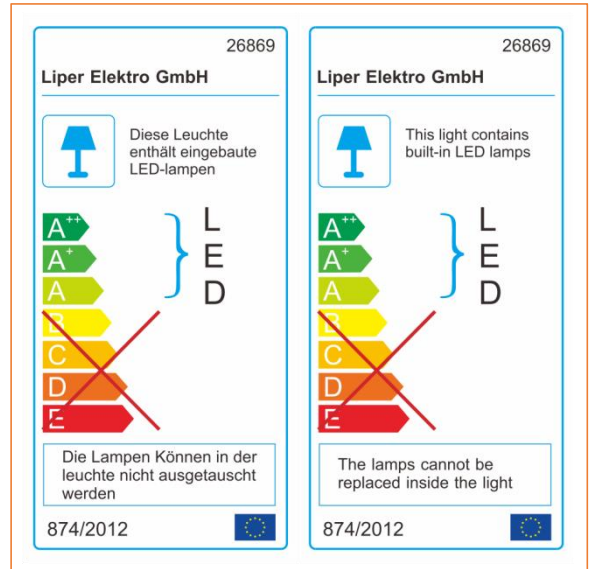

Cutting Size



Specifications

Item Number	Power (W/M)	Power Factor	Lumen (lm)	LED Line	Size	CRI	Color Temperature	Life Time (hrs)
LPSTL-10A01	10W/M	>0.9	1250LM/M	1 line	24V-2835-120D-8MM	>83	Cool White	30000
LPSTL-10A01	10W/M	>0.9	1250LM/M	1 line	24V-2835-120D-8MM	>83	Natural White	30000
LPSTL-10A01	10W/M	>0.9	1250LM/M	1 line	24V-2835-120D-8MM	>83	Warm White	30000



Technical Specifications

On/Off Cycles	100,000
Color Tolerance Adjustment (SDCM)	<6
IP	68
Class	III
LED Driver	Non
Output Voltage	24V

Temperature

Operating Temperature	-15°C ~ 50 °C
Testing Temperature	-20°C ~ 95 °C

Initial Performance (IEC Compliant)

Luminous Flux Tolerance	+/-10%
Power Consumption Tolerance	+/-10%

Packing Data

Item No	PCS/CTN	Gross Weight KG	Net Weight KG	Length CM	Width CM	Height CM
LPSTL-10A01	100	7.5	7.2	30	22.5	30.5

10METER/ROLL 10ROLL/CARTON

Dimensional Drawing

Item No	Power	Width (mm)	Cutting Size (mm)
LPSTL-10A01	10W/M	8	50



Power Supply

100W	200W	200W	400W
24V/4.17A	24V/8.34A	24V/12.5A	24V/16.77A

Packing Data

Item No	PCS/CTN	Gross Weight KG	Net Weight KG	Length CM	Width CM	Height CM
100W	30	14.9	13.8	34	20.5	24
200W	20	14.5	13.4	34	23	24
300W	16	17.4	16.2	36	26	20
400W	16	17.4	16.2	36	27.5	20

